

## 5500M SERIES MEDICAL AUTOMATIC MANIFOLD SYSTEMS

GENTEC® 5500M series medical automatic manifold system is designed to provide an uninterrupted gas supply without any manual adjustments. This system automatically switches over when the primary cylinder bank is depleted. Even in case of a power failure, the system continues to supply gas without interruption. The system is compliant with NFPA 99 and ISO 7396, HTM 02-01 is optional.



### Features

#### Automatic Changeover System

- Fully enclosed, tamper-resistant metal cabinet.
- Stainless steel diaphragm regulator ensures steady gas flow.
- LED indicators provide system status ("IN USE"-green, "READY"-yellow, "EMPTY"-red).
- Patent pending changeover technology.
- Integral alarm. Remote alarm available.

### Specifications

GENTEC® 5500M Series automatic manifold systems shall be manufactured by Genstar Technologies Co., Inc. in an ISO 13485 certified facility. The systems shall be compliant with NFPA 99, HTM 02-01 and ISO 7396.

The 5500M changeover system includes two primary regulators, gas specific cylinder connections, and a single-point power connection. Nitrous oxide and carbon dioxide changeover systems include pre-wired heaters. The changeover system shall automatically switch to the reserve bank when the pressure in the primary bank falls to a predetermined level.

The 5500M Series automatic manifold systems shall be able to operate without electrical power (except for the heaters for nitrous oxide and carbon dioxide systems). Only the status indicator and alarms require electrical power, therefore in the event of a power

#### Pipeline

- Open-style manifold system, designed for future expansion needs.
- Silver brazing on piping joints for maximum leak prevention.
- Unique changeover valve provides uninterrupted supply of gas from primary and reserve banks.
- Easy installation and maintenance.
- Wall mount available.


failure, the system shall continue to supply gas without interruption.

Header bars shall be made of silver brazed, rigid, brass pipe and fittings.

Pigtails shall be gas-specific, complete with CGA nut and nipple inlet and outlet fitting. Check valve shall be optional. Pigtails for oxygen and nitrous oxide applications are of 24" or 36" semi-rigid copper. Pigtails for carbon dioxide, nitrogen, and medical air applications are of 24" or 36" flexible stainless steel. The system shall be furnished with a separate power supply to convert 220/110 V to 24 V output power.

Each manifold system shall be cleaned for oxygen service in strict accordance with CGA 4.1, and 100% factory tested for proper operation prior to shipment.

### Dimensions

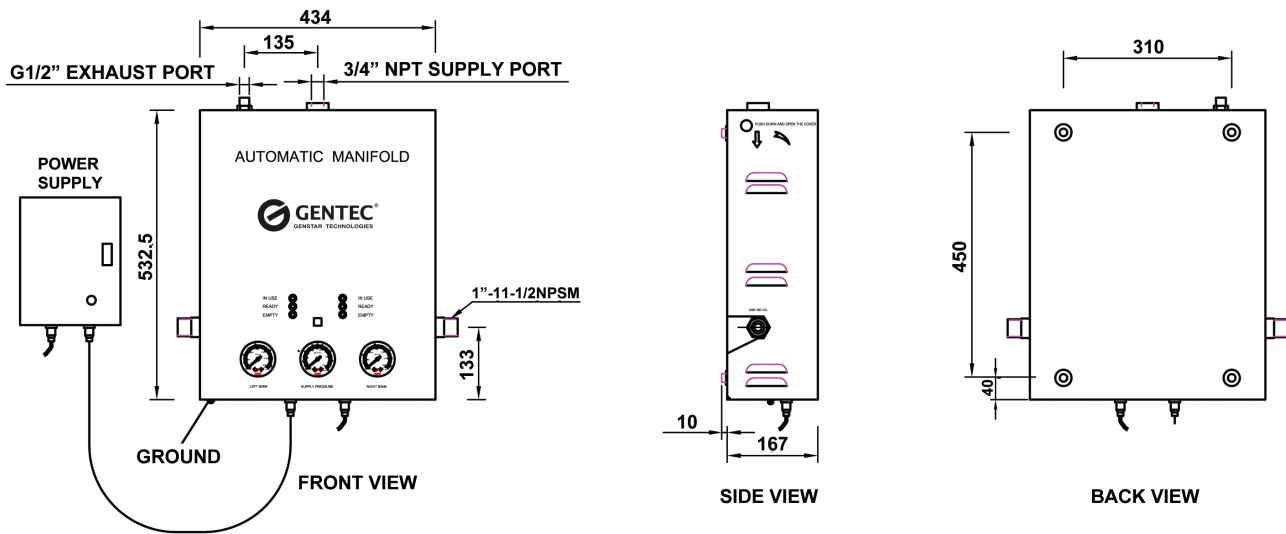

### Ordering Information

Please follow the instructions below to select the correct model number.

55	1	2	M	X	0 * 0	1
Automatic manifold system series prefix	Manifold system layout	Cylinder valve spacing	Medical	Gas Service	Number of cylinders	Type of mounting

Gas Service	
X	Oxygen
A	Medical Air
IA	Instrument Air
N <sub>2</sub> O	Nitrous Oxide
IN	Nitrogen
C	Carbon Dioxide

Cylinder Spacing (Center to Center)	
1	5"
2	10"
3	13"
4	18"

Number of Cylinders	
Null	Single Changeover Box
5*5	Left * Right Number of cylinders (filters and master shutoff valves included)

Type of Mounting	
1	Wall Mount
2	Floor Mount

Manifold System Layout	
1	Standard Layout
2	"L" shape Layout
3	"U" shape Layout
4	Crossover Layout
5	Staggered Layout

Example: 5512MX-5\*5-1 indicates a 5\*5 oxygen cylinder automatic manifold system. Distance between two cylinders is 10" on standard horizontal layout.

5500MX-0\*0 indicates an oxygen changeover system with filters and master shutoff valves.

5500MX indicates an oxygen changeover system only.

Series Number	Gas Service	Inlet Pressure psi (bar)	Delivery Flow m <sup>3</sup> /h (SCFH)	Delivery Pressure psi (bar)	Outlet Connection	Inlet Connection	Power
5500MX	Oxygen	150-3000	100 (3530)	60 (4.1)	3/4" NPT	Pigtail, CGA540	110 / 220 V, 50 HZ
5500MA	Medical Air	150-3000	100 (3530)	60 (4.1)	3/4" NPT	Pigtail, CGA346	110 / 220 V, 50 HZ
5500MIA	Instrument Air	250-3000	100 (3530)	180 (12.4)	3/4" NPT	Pigtail, CGA346	110 / 220 V, 50 HZ
5500MN <sub>2</sub> O	Nitrous Oxide	150-3000	50 (1765)	60 (4.1)	3/4" NPT	Pigtail, CGA326	110 / 220 V, 50 HZ
5500MIN	Inert Gas	250-3000	100 (3530)	180 (12.4)	3/4" NPT	Pigtail, CGA580	110 / 220 V, 50 HZ
5500MC	Carbon Dioxide	150-3000	50 (1765)	60 (4.1)	3/4" NPT	Pigtail, CGA320	110 / 220 V, 50 HZ